ROTEL®

A14 Pikaopas
A14 Snabbstart

1

A14 Pakkauksen sisältö
A14 Kartongens innehåll

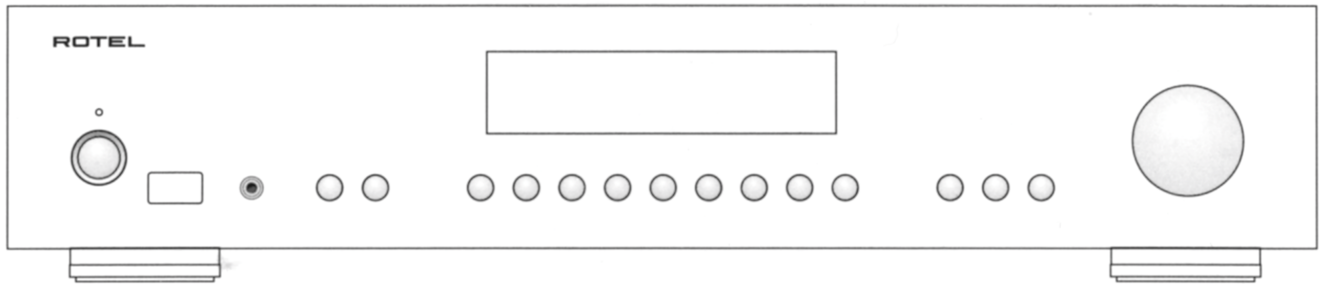

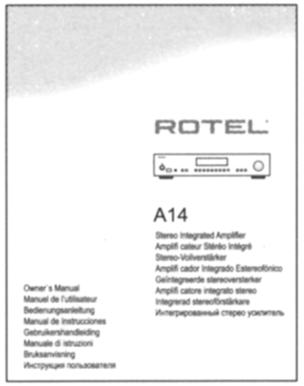

Käyttöohjeet löydät osoitteesta
Manualer hittar du på adressen
www.rotel.com

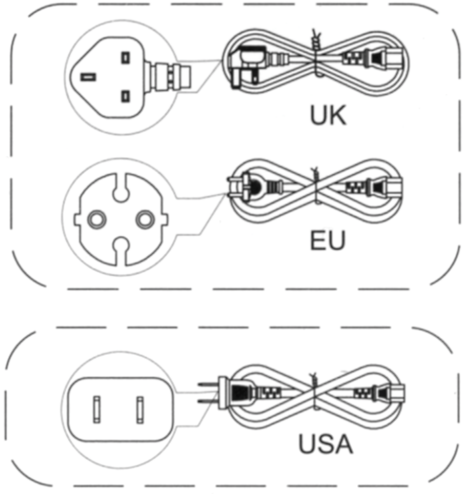





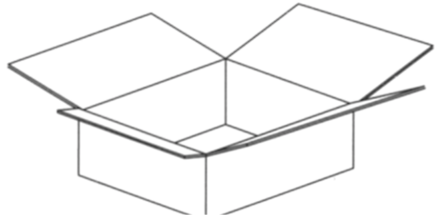

2

Vinylisoittimen liitäntä ja maakaapeli
Skivspelare och jord

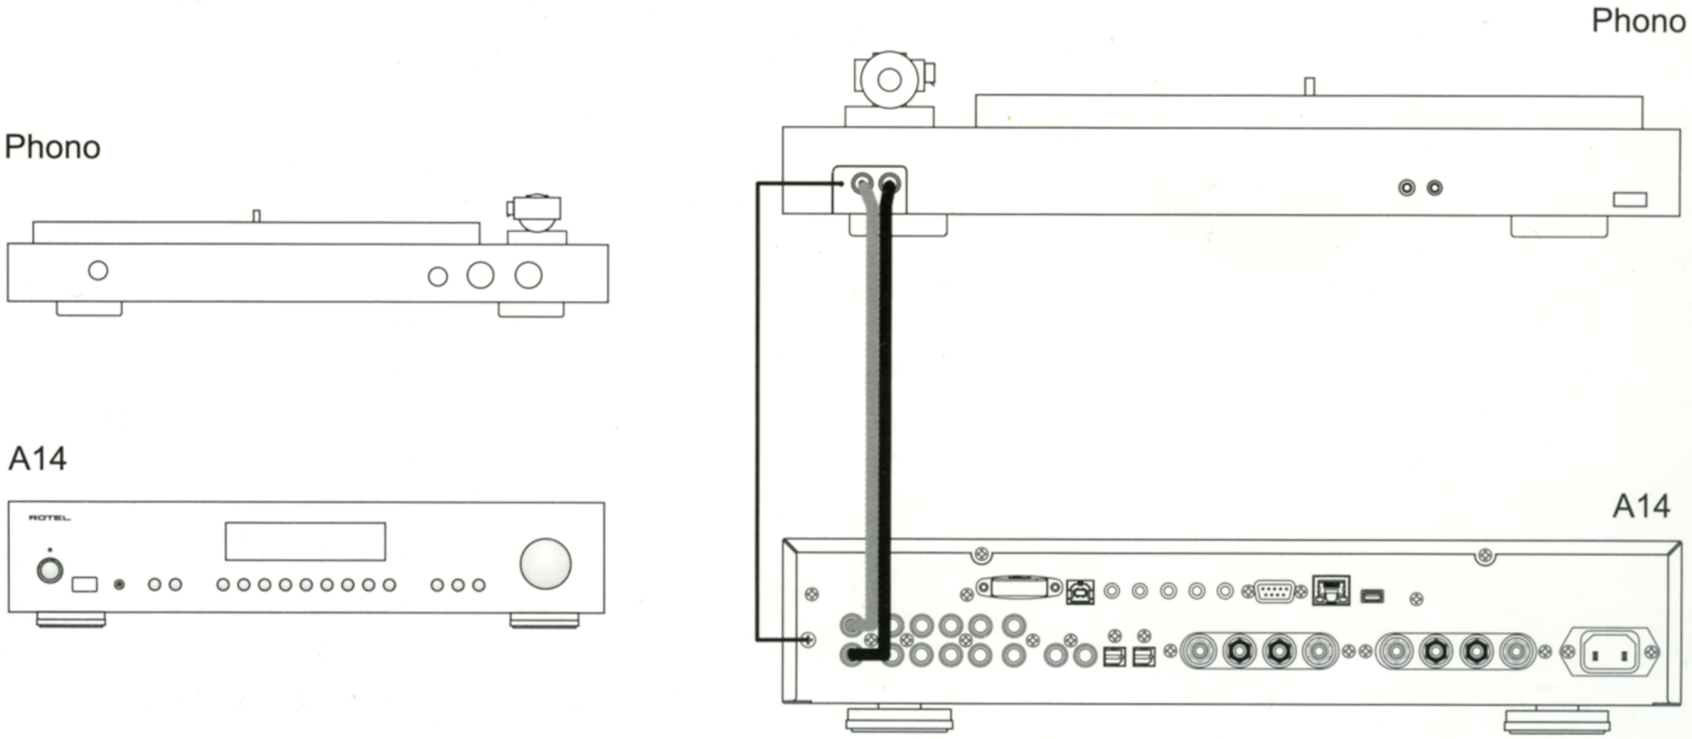

3 Etupanelin USB-portti
USB-port på fronten

iPhone

A14

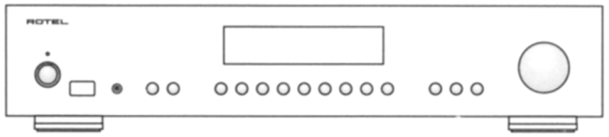

A14

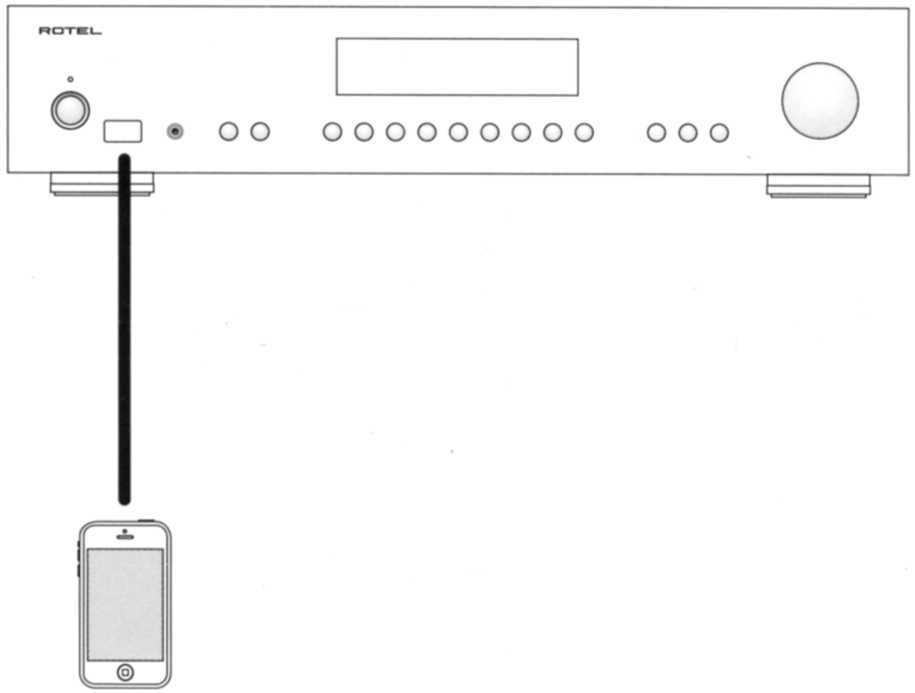

4 CD-soittimen liittäminen
CD-anslutning

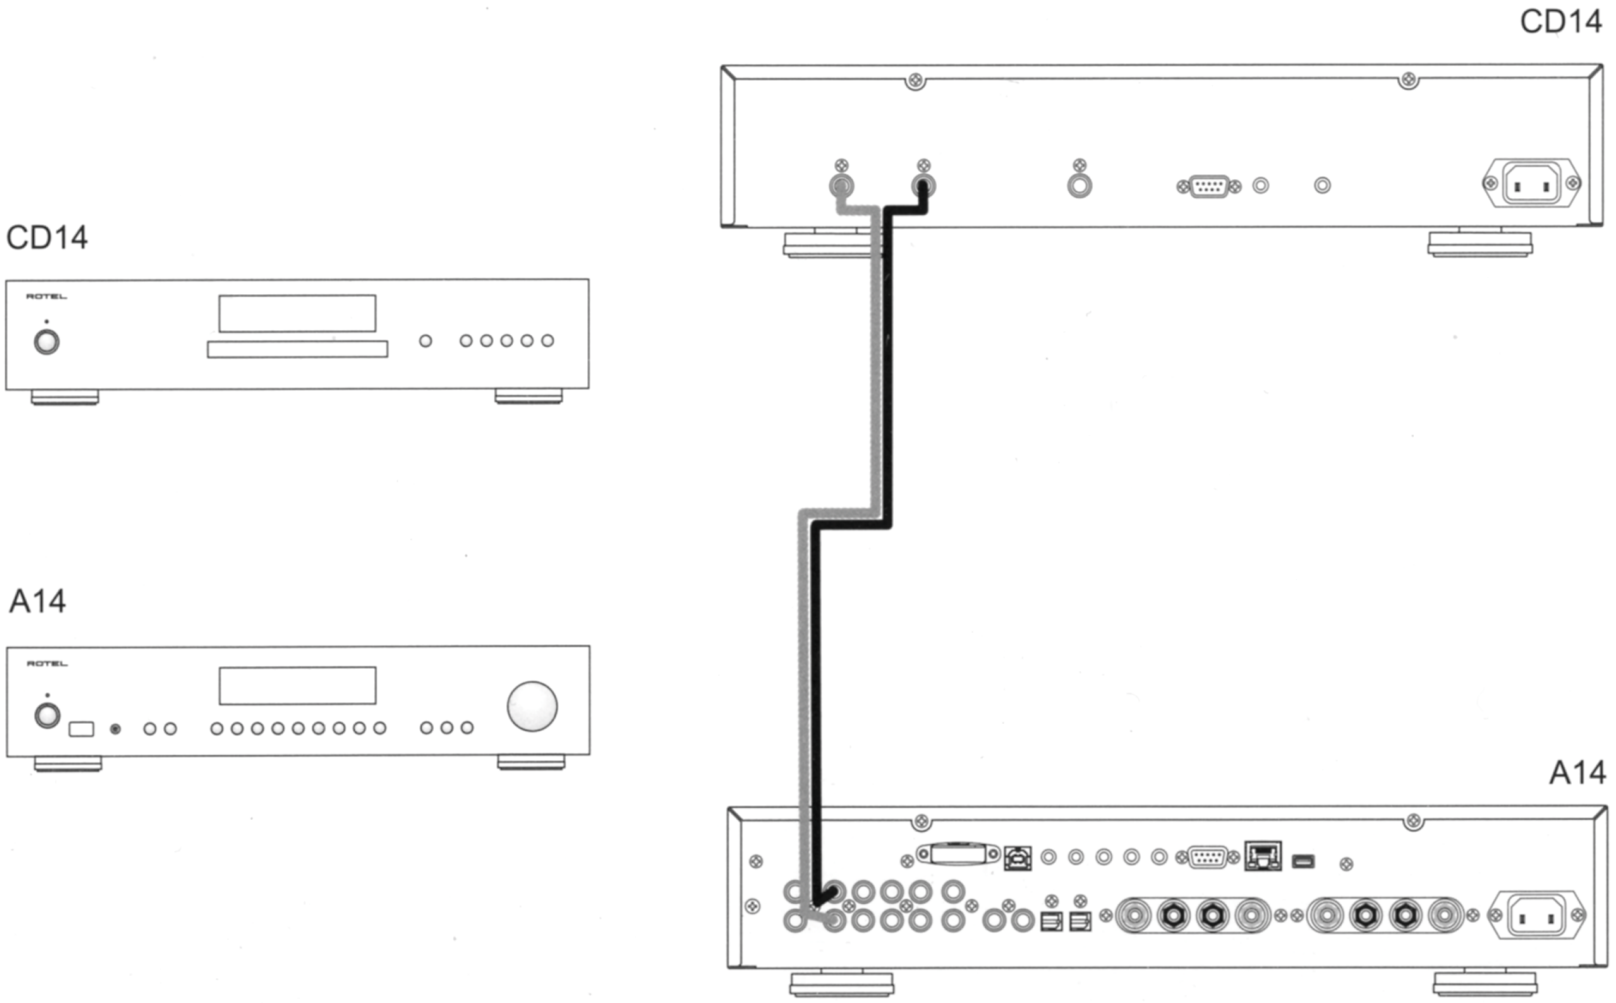

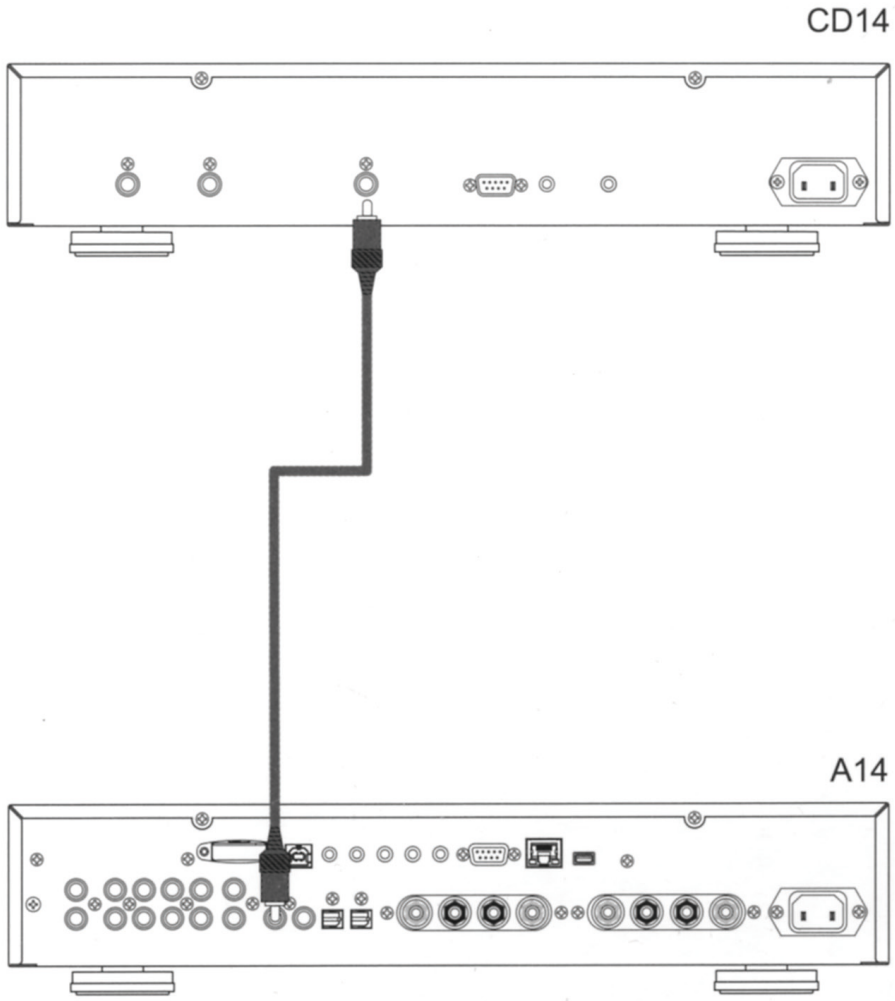
CD14
A14

5 Kaiuttimien liittäminen
Anslutning av högtalare

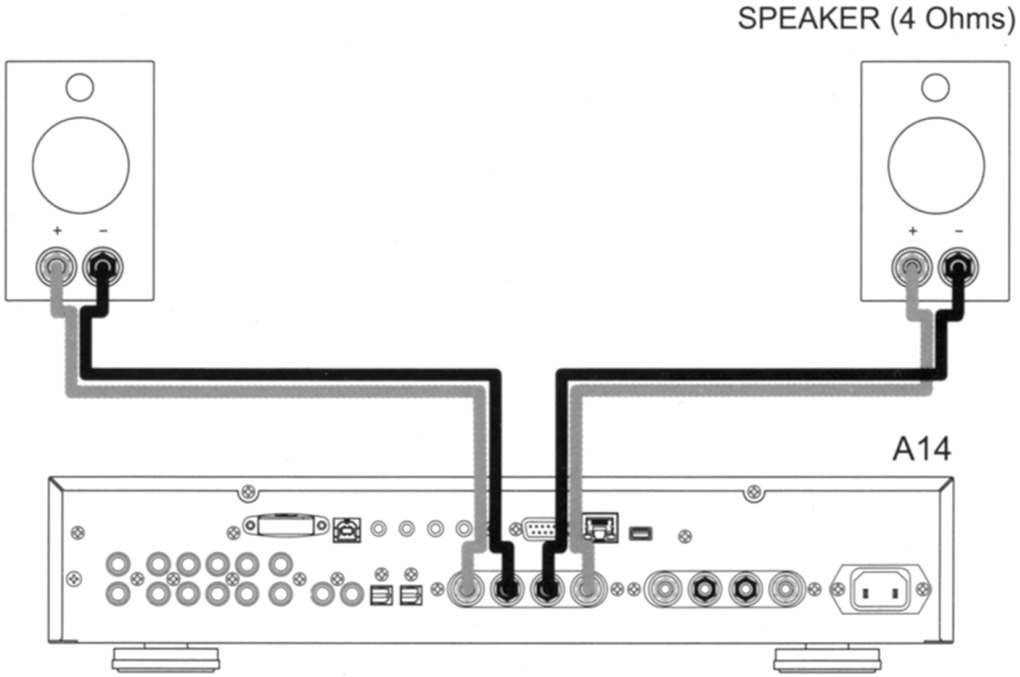

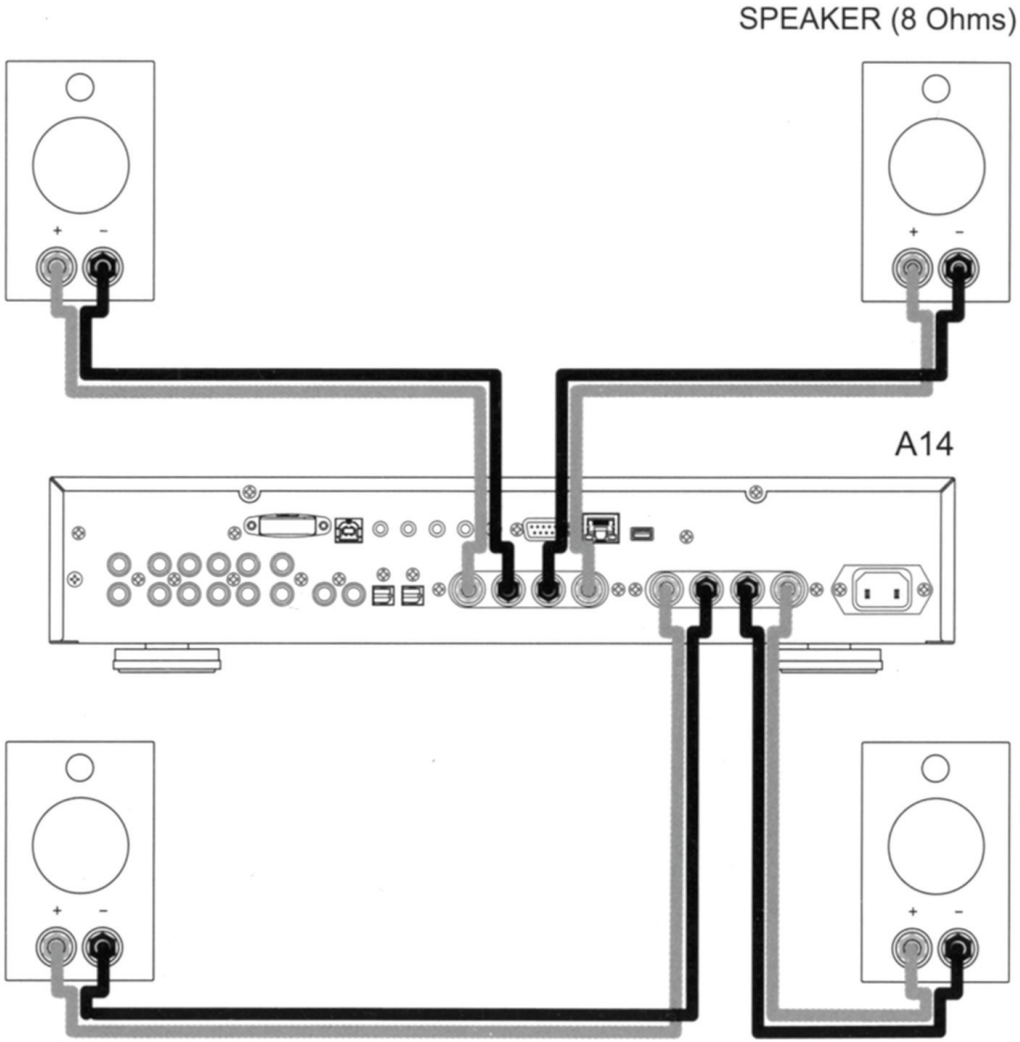
SPEAKER (8 Ohms)
A14

6 PC-USB-liitäntä
PC-USB-ingång

COMPUTER

A14

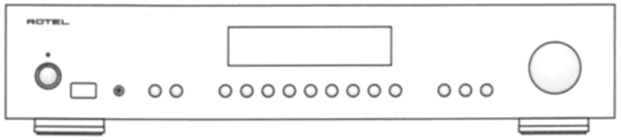

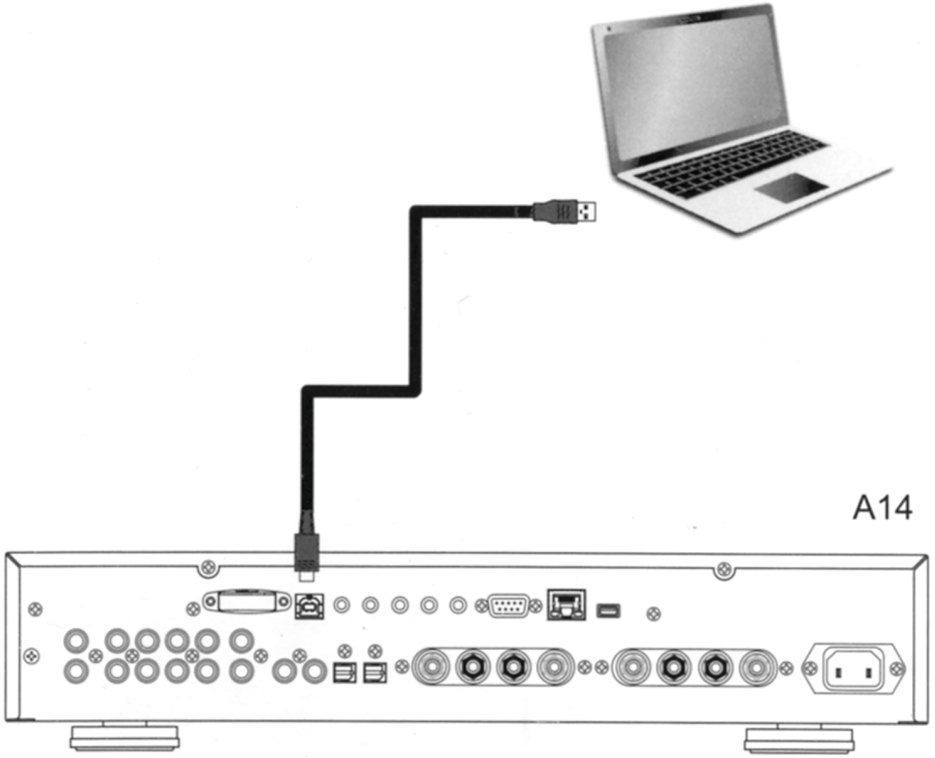

A14

7

Rotel link liitäntä
Rotel link anslutning

T14

A14

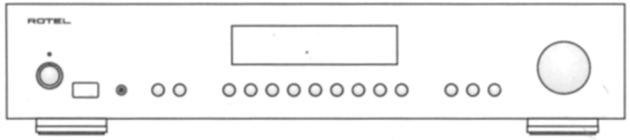

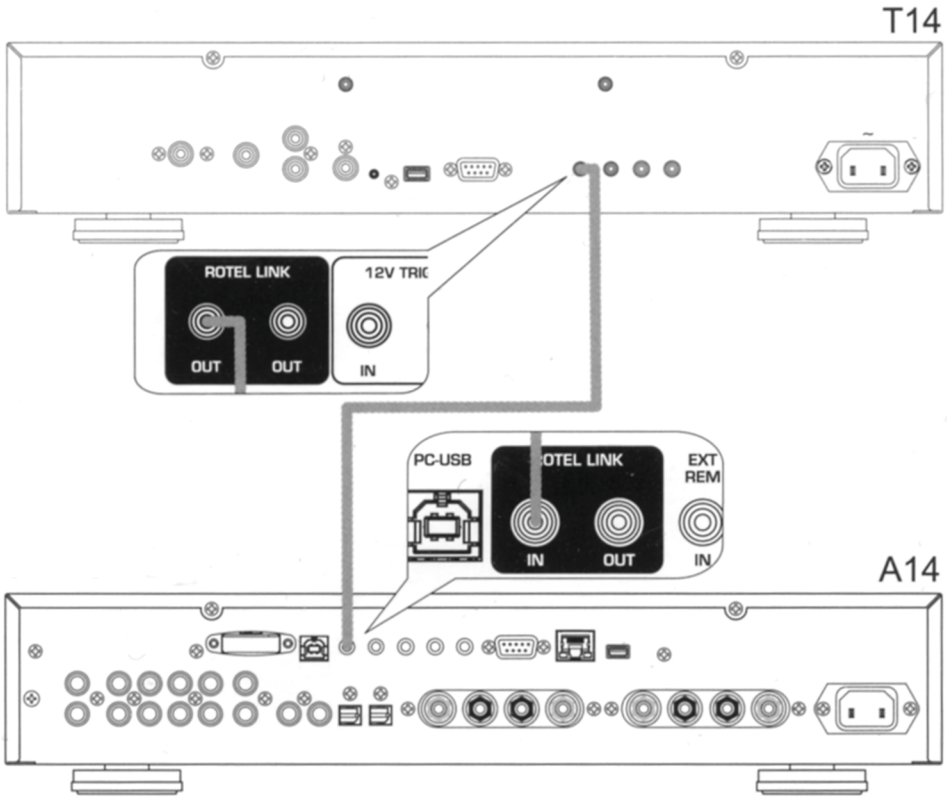

8

12-voltin herätevirta
12-volts styrsignaler

T14

A14

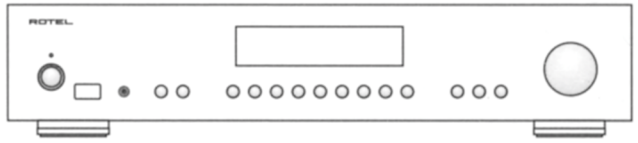

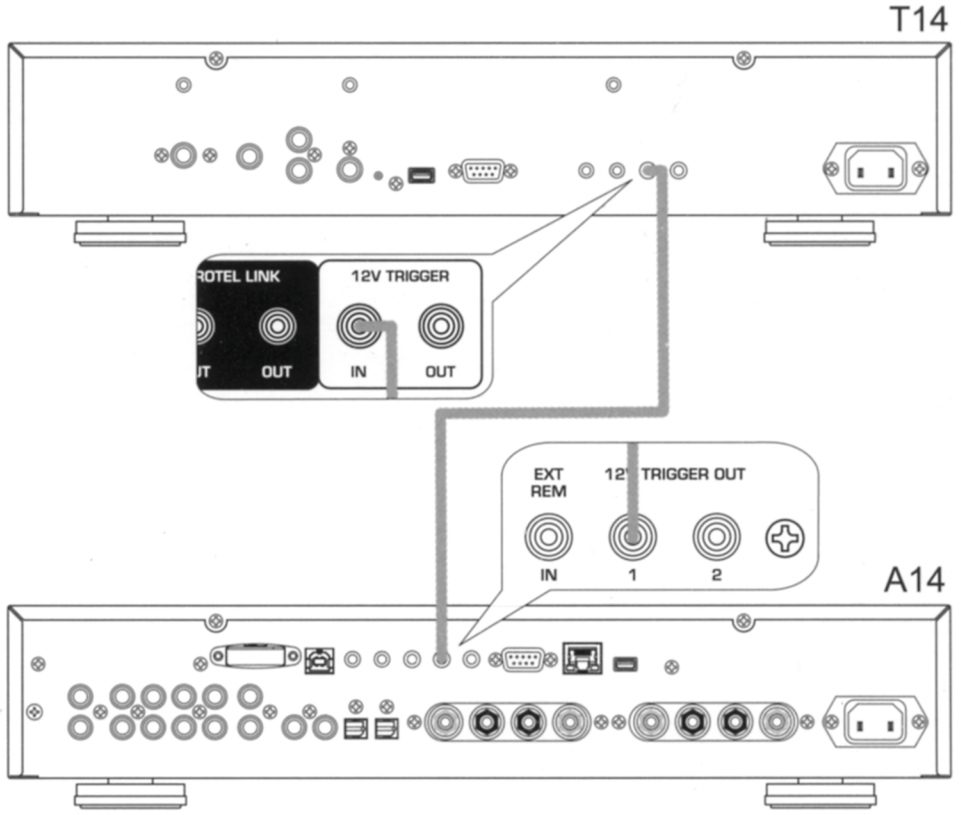

SPECIFICATIONS

Continuous Power Output: (20 - 20kHz, < 0.03%, 8 ohms)	80 watts/ch
Total Harmonic Distortion (20 Hz - 20 kHz at rated power)	< 0.03%
Intermodulation Distortion (60 Hz : 7kHz, 4:1)	< 0.03%
Frequency Response	
Phono Input	20Hz - 15kHz, ± 0.5dB
Line Level Inputs	10Hz - 100kHz, ± 0.5dB
Damping Factor (20 - 20,000 Hz, 8 ohms)	220
Input Sensitivity / Impedance	
Phono Input	3.4 mV / 47k Ohms
Line Level Inputs	230 mV / 24k Ohms
Input Overload	
Phono Input	50 mV
Line Level Inputs	4V
Preamp Output / Impedance	1.2 V / 470 Ohms
Tone Controls - Bass / Treble	± 10 dB at 100Hz / 10kHz
Signal to Noise Ratio ("A" weighting)	
Phono Input	90 dB
Line Level Inputs	100 dB
Digital Section	
Frequency Response	10Hz - 80kHz (± 3.0dB, MAX)
Signal to Noise Ratio (IHF "A" weighted)	103 dB
Input Sensitivity/Impedance	0 dBfs/75 Ohms
Preamplifier Output Level	1.3 V (at - 20dB)
Digital Inputs	SPDIF LPCM up to 192kHz / 24 bit)
PC-USB	USB Audio Class 1.0 (up to 96kHz 24bit) USB Audio Class 2.0 (up to 384kHz 32bit)* *Driver installation required DSD and DoP support
General	
Power Requirements	
Europe	230V, 50Hz
USA	120V, 60Hz
Power Consumption	280 watts
Standby Power Consumption	< 0.5 watts
Finishes	Silver and Black
Dimensions (W x H x D)	430 x 93 x 345mm 17" x 3 5/8" x 13 1/2"
Front Panel Height	80mm, 3 1/8"
Weight (net)	8.2kg, 18 lb